

Face Recognition And Detection using Opencv

R.Prasanth^a, L.Logesh^a

^aUG Student, Department of Computer Science and Engineering, Nandha College of Technology, Erode-52, Tamilnadu, India

^aUG Student, Department of Computer Science and Engineering, Nandha College of Technology, Erode-52, Tamilnadu, India

***Corresponding Author**
prasanth98780@gmail.com
(R.Prasanth)
Tel.: +91 7397152340
Received : 19-2-2019
Reviewed : 25-3-2019
Revised : 26-4-2019
Accepted : 05-5-2019

DOI:

Abstract : - Face detection and recognition from an image or a video is a popular topic in biometrics research. Face recognition technology has widely attracted attention due to its enormous application value and market potential, such as real-time video surveillance system. It is widely acknowledged that the face recognition has played an important role in surveillance system as it doesn't need the object's co-operation. We design a real-time face recognition system based on IP camera and image set algorithm by way of OpenCV and Python programming development. The system includes three parts: Detection module, training module and recognition module

Keywords: face, detection, recognition, system, OpenCV.

1 Introduction

Face detection and recognition is technology which is used to identify a person from a video or photo source. In the 1960s face recognition was introduced by Woodrow Wilson Bledsoe. Bledsoe developed a device that could classify photos of faces by hand using what's known as a RAND tablet, a device that people could use to input horizontal and vertical coordinates on a grid using a pen like stylus that emitted electromagnetic pulses. Ever since then the recognition system is being improved and optimized constantly, the technology becomes gradually mature and is more and more widely used in human daily life. It has been used increasingly for forensics by law enforcement and military professionals. In fact, facial recognition system was used to help confirm the identity of Osama bin Laden after he was killed in a U.S. raid. The face recognition system is also being increasingly used in the mobiles for device security. In this paper, we propose a face detection and recognition system using python along with OpenCV package. This system contains three modules which are detection, training and recognition. Basically, the detection module detects the face which gets into the field of vision of the camera and saves the face in the form of an image in JPG format. Then the training modules trains the system using Haar cascade algorithm which was proposed by Paul Viola and Michael Jones in their paper.

R. Prasanth, L.Logesh

2 Methodology

2.1 Haar Feature Selection:

First step is to collect the Haar Features. A Haar feature considers adjacent rectangular regions at a specific location

in a detection window, sums up the pixel intensities in each region and calculates the difference between these sums.

2.2 Creating Integral Images

Integral Images are used to make this process fast. Most of the calculated features are irrelevant.

2.3 Adaboost Training

A concept called Adaboost which both selects the best features and trains the classifiers is used. This algorithm constructs a strong classifier using a linear combination of weighted simple weak classifiers.

2.4 Cascading Classifiers

The cascade classifier consists of a number of stages, where each stage is a group of weak learners. These weak learners are simple classifiers called decision stumps. Each stage is trained using a method called boosting. Boosting provides the ability to train a highly accurate classifier by

taking the weighted average of decisions made by the weak learners. Finally, in the recognition module the principal components of the face from the new video are extracted. Then those features get compared with the list of elements stored during training and the ones with the best match is found and name of the person recognized is displayed. This monitoring system fulfills the basic needs of face detection and recognition system, also takes the cost into consideration to ensure the pervasive mode as economical as possible. Furthermore, it can also be combined with real-time analysis algorithms.

3 Existing System

3.1 Linear Discriminant Analysis

LDA is a method to find a linear combination of features which characterize or separate two or more classes of objects or events. Linear classifier can be obtained from the resultant. Large number of pixels are used to represent face in computerized face recognition. Before classification Linear discriminant analysis is used to reduce features and makes it more manageable. New dimensions are a linear combination of pixel values which forms a template.

3.2 Principal Component Analysis PCA involves a mathematical procedure that transforms a number of possibly correlated variables into a smaller number of uncorrelated variables. Please purchase PDF SplitMerge on www.verypdf.com to remove this watermark. 5 called principal components. The variability in the data is accounted by the first principal components and the succeeding components accounts for further variability. For exploratory data analysis and for making predictive models PCA is the most used tool. The calculation of the eigen value decomposition of a data covariance matrix or singular value decomposition of a data matrix is done with the help of PCA. Eigenvector-based multivariate analysis is made easy with the help of PCA. The variance present in the data is best explained by revealing the internal structure of the data which is considered to be one of the important operations. If a multivariate dataset is visualized as a set of coordinates in a high-dimensional data space (one axis per variable, a lower-dimensional picture is supplied by PCA, a "shadow" of this object is visible when viewed from its (in some sense) most informative viewpoint.

3.3 Hidden Markov Model

A hidden Markov model (HMM) is a statistical model that can be used to describe the evolution of observable events that depend on internal factors, which are not directly observable. The observed event is called as a 'symbol' and the factor underlying the observation is a 'state'. Hidden Markov models are especially known for their applications in temporal pattern recognition such as speech, handwriting, gesture recognition, part-of-speech tagging, partial discharges and bioinformatics.

4 PROPOSED SYSTEM AND TECHNIQUE

The quality of image depends on plethora of factors that influence the system's accuracy. It is important to apply various pre-processing techniques to standardize the images that you supply to a face recognition system. Face recognition algorithm usually find it difficult to recognize a face under extreme light sensitive conditions. If the system was trained to recognize a person when they are in a dark room, then it is highly possible that it won't recognize them in a bright room. This problem is referred to as "lumination dependent". There are many other issues, such as the face should also be in a very consistent position within the images like the eyes being in the same pixel coordinates, consistent size, rotation angle, hair and makeup, emotion like smiling, angry, etc. Hence it is important to use a good image preprocessing filter. For simplicity, the face recognition system presented in this paper is Eigenfaces using grayscale images. This paper shows us that it is easy to convert color images to grayscale (also called 'grayscale') and then to apply Histogram Equalization. It is a very simple method of automatically standardizing the brightness and contrast of your facial images. For better results, apply more processing stages such as edge enhancement, contour detection, motion detection, etc. OpenCV uses a face detector algorithm called a Haar Cascade classifier. An image, can come from a file or from live video, the face detector examines each image location and classifies it as "Face" or "Not Face." Classification assumes a fixed scale for the face. Faces in an image can be smaller or larger, the classifier runs over the image several times, to search for faces across a range of images. The classification is fast, even when it's applied at several scales. The code for the recognition system is given below

5 Sample Code


5.1. Face Recognition

```
# import the necessary packages
from imutils import paths
import numpy as np
import argparse
import imutils
import pickle
import cv2
import os

# construct the argument parser and parse the
arguments
ap = argparse.ArgumentParser()
ap.add_argument("-i", "--dataset", required=True,
                help="path to input directory of faces +
                images")
ap.add_argument("-e", "--embeddings", required=True,
                help="path to output serialized db of facial
                embeddings")
ap.add_argument("-d", "--detector", required=True,
                help="path to OpenCV's deep learning face
                detector")
ap.add_argument("-m", "--embedding-model",
                required=True,
                help="path to OpenCV's deep learning face
                embedding model")
ap.add_argument("-c", "--confidence", type=float,
                default=0.5,
                help="minimum probability to filter weak
                detections")
```

```
args = vars(ap.parse_args())
```

6 SYSTEM ARCHITECTURE

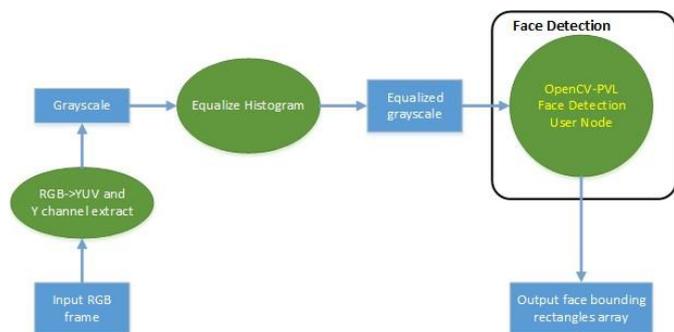

7 Conclusions

In this paper we have developed a system for face detection and recognition using opencv. It is used to detect and recognize human faces. The images of the persons are the datasets which are defined and trained before recognizing. Haar cascade algorithm is used for detection. For better face recognition and detection small features can be improved. In the coming future, as technology advances, more advance features will be added to the system

REFERENCE

Gkoutioudi K Z, Karatza H D, "Multi-criteria job scheduling in Grid using an accelerated genetic algorithm", J Grid Computing, vol. 10, no.2, pp.311-323, 2012.

SeyyedaliFattahi, Zalinda Othman, Zulaiha Ali Othman, "New approach withensemble method to address class imbalance problem", Journal of Theoretical and Applied Information Technology, 2015.

V.S. Sureshkumar, A.Chandrasekar, "Fuzzy-GA Optimized Multi-Cloud Multi-Task Scheduler For Cloud Storage And Service Applications", International Journal of Scientific & Engineering Research , Volume 4, Issue3, March-2013

S. Wang and X. Yao, "Diversity analysis on imbalanced data sets by using ensemble models", IEEE Symposium, Computational Intelligence and Data Mining (IEEE 09). Nashville TN (USA, 2009), 324-331.

Sahoo R, Sivasubramaniam A, Squillante M S, Zhang Y, "Failure data analysis of a large-scale heterogeneous server environment", In: Proceedings of the International

Conference on Dependable Systems and Networks (DSN), Florence, Italy, 2004.

V.S. Sureshkumar, Dr.M. Vijayakumar, "DDoS Attack Detection By using Traffic Flow Analysis for Streaming Data ", International Journal on Engineering technology and Science pp:2-7, Issue 8, volume 2,2015

Heath T, Martin R, Nguyen T D, "Improved cluster availability using workstation validation", In: The ACM SIGMETRICS 2002, Marina Del Rey, CA, pp. 217-227, 2002.

Preethi, B.C. and Vijayakumar, M. " A novel Cloud Integration Algorithm(CIA) for Energy Efficient High Performance Computing Applications in Big Data Multimedia Applications", Romanian Journal of Information Science and Technology, vol. 2, no.1, pp. 1-11, March 2018

Durillo J J, Prodan R, Fard H M, "Moheft: a multi- objective list-based method for workflow scheduling", In: Proceedings of 2012 IEEE 4th International Conference on Cloud Computing Technology and Science (CloudCom), pp.185-192, 2012.

Prakash, S. and Vijayakumar, M., "An effective network traffic data control using improved Apriori rule mining," Circuits and Systems, Issue 10, Vol. 07, pp. 3162-3173, June 2016.

Prakash, S. and Vijayakumar, M., "Risk Assessment in Cancer Treatment using Association Rule Mining Techniques," Asian Journal of Research in Social Sciences and Humanities, Issue 10, Vol. 06, pp. 1031-1037, June 2016.

Vijayakumar, M. and Prakash, S., "An Improved Sensitive Association Rule Mining using Fuzzy Partition Algorithm," Asian Journal of Research in Social Sciences and Humanities, Issue 06, Vol. 06, pp. 969-981, June 2016.

Saveetha P and Arumugam S, "Study on Improvement in RSA Algorithm and its Implementation", International Journal of Computer & Communication Technology, Vol.3 No.6,PP.78, 2012.

H. Han, W.Y. Wang and B.H. Mao, "Borderline-SMOTE: A new over-sampling method in Imbalanced data sets learning", 2005 International Conference on Intelligent Computing (ICIC05).Springer 2005, Hefei (China, 2005) 878-887.

NiteshV.Chawla, Nathalie Japkowicz and AleksanKolcz, "Editorial: Special Issue on Learning from the Imbalanced Data Sets", SIGKDD Explorations 6 (1), (2004), 1-6.

C.Seiffert, T.Khoshgoftar and J.VanHulse, "Rus Boost: A Hybrid approach to alleviating the class imbalance", IEEE Transactions on Systems, Man and Cybernetics, Part a 40:1 (2010), 185-197.

V.S. Sureshkumar . "Privacy preservation for cloud Data

- using Triones in Multi cloud”, International journal of innovative Research in Engineering Science and Technology pp:1-7, Issue Special issue, volume3,2016
- Saranya M and Nithya K, “Campus Navigation and Identifying Current Location through Android Device to Guide Blind People”, International Research Journal of Engineering and Technology (IRJET), Vol.02,Issue : 08,Nov 2015.
- Abraham A, Izakian H, “A novel particle swarm optimization approach for grid job scheduling”, Information Systems, Technology and Management, vol. 21, pp. 100-109, 2009.
- V.S. Sureshkumar “Optimized Multicloud Multitask Scheduler for Cloud Storage and Service by Genetic Algorithm and Rank Selection Method” ,International Journal of Advanced Science Engineering and Technology , pp:2-7, Issue 4, volume 3,2014
- Gokulraj P and Kiruthikadevi K, “Revocation and security based ownership deduplication of convergent key creating in cloud”, International Journal of Innovative Research in Science, Engineering and technology. Vol. 3, Issue 10, ISSN: 2319-8753, October 2014.
- S. Yen and Y. Lee, “Under - sampling approaches for improving prediction of minority class in an imbalanced data set”, International Conference on the Intelligent Computing (ICIC06), Kunming (China, 2006), 731-740.
- V.S. Sureshkumar “Extended Framework For Dynamic Resource Allocation Using Asjs Algorithm In Cloud Computing Environment” , International Journal on Engineering Technology and Sciences, pp:1-7, Issue 8, volume 1,2014
- Saveetha P, Arumugam S and Kiruthikadevi K, “Cryptography and the Optimization Heuristics Techniques”, Int. Journal of Advanced Research in Computer Science and Software Engg , volume. 4, Issue.10, ISSN: 2277 128X, October 2014.
- Foster I, Roy A, Sander V, “A quality of service architecture that combines resource reservation and application adaptation”, In: Proceeding of the 8th International Workshop on Quality of Service, Pittsburgh, PA, USA, pp. 181-188, June 2000.
- Nithya K, Kalaivaani P C D and ThangarajanR, “An enhanced data mining model for text classification”, International Conference on Computing, Communication and Applications,PP.1-4,2012.
- Song S S, Hwang K, Kwok Y K, “Trusted grid computing with security binding and trust integration”, J Grid Computing, vol. 3, no. 2, pp. 53-73, 2005.
- V.S. Sureshkumar, D. Joseph Paul, N.Arunagiri, T.Bhuvaneshwaran , S,Gopalakrishnan “Optimal Performance And Security Of Data Through FS- Drops Methodology” ,International Journal of Innovative Research In Engineering Science and Technology , pp:1-7, Issue 3, volume5,2017
- Kamesh V, Karthick M, Kavin K, Velusamy M and Vidhya R, “Real-Time Fraud Anomaly Detection in E-banking Using Data Mining Algorithm”, South Asian Journal of Engineering and Technology,Vol.8,supplementary issue.1,PP.144-148,April 6,2019.
- Garg S K, Buyya R, Siegel H J, “Time and cost trade- off management for scheduling parallel application on utility grids”, Future Gener Comput Syst., vol. 26, no.8, pp. 1344-1355,2010.
- Vijayakumar M and Prabhakar E, “A Hybrid Combined Under-Over Sampling Method for Class Imbalanced Datasets”, International Journal of Research and Advanced Development (IJRAD), Volume 02, Issue 05, pp. 27-33, December 2018.
- C.V.Chawla, A. Lazarevic, L.O. Hall and K. Bowyer, “SMOTE Boost: Improving prediction of the Minority Class in the Boosting”, 7th European Conference on the Principles and Practice of Knowledge Discovery in Databases, Cavtat (2003), 107-119.
- Y. Freund and R.E. Schapire, “A decision - theoretic Generalization of the on-line learning and an application to boosting”, Journal of Computer and System Sciences 55:1 (1997), 119-139.
- V.S. Suresh kumar, Vijaya Rao.S, V Vijay, D Nagarjun, G Thangavel “E-Commerce Recommendation over Big Data based on early reviewers for effective product marketing Prediction Rates”, South Asian Journal of Engineering and Technology, pp: 202-204, Issue 204, volume 202, 2019
- Bhatia R, “Grid computing and security issues”, International journal of scientific and research publications, vol. 3, no. 8, pp. 1-5, 2013.4
- Malarvizhi N, Uthariarai V R, “Hierarchical load balancing scheme for computational intensive jobs in grid computing environment”, In: Proceeding of the 1st IEEE International Conference on Advanced Computing, pp. 97-104, 2009.

